

MAINTENANCE/FACILITIES CLEANERS



ID 240 LF

Industrial Strength Maintenance Cleaner/Degreaser

Biodegradable & Non-Hazardous

ID 240LF is a free rinsing, low foam, concentrated, industrial-strength liquid cleaner/degreaser that works well on steel, stainless steel, aluminum, brass, copper, and plastic.



Industrial-Size Praise

Not only are our floors clean, we reduced our usage cost!
-- Operations Manager,
Distribution Warehouse

You were right. During shutdown we used ID 240 to clean everything in the plant. -- Superintendent,
Press Department

Meets USDA/FSIS Requirements


ID 240LF has been formulated and labeled in accordance with the new sanitation regulations and guidelines as set forth in the Sanitation Performance Standards Compliance Guide under the authority of the United States Department of Agriculture (USDA).

Powerful and Versatile

Call now and see how to qualify for a FREE sample!

800.882.5966

Grease panel test

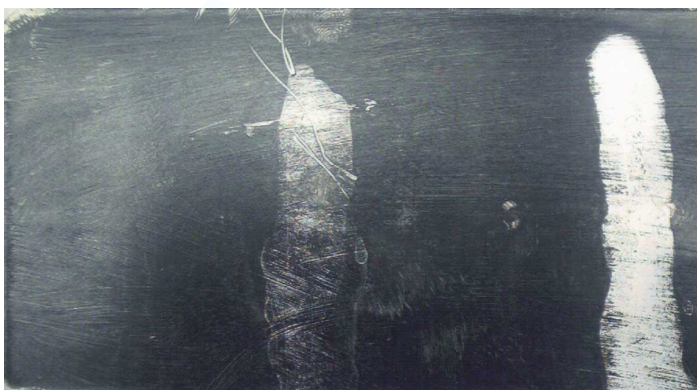

Competitor A
(1:10 Dilution)

Competitor A
(Full Strength)

Competitor B
(Full Strength)

ID 240
(1:10 Dilution)



300 AIR PARK ROAD · TUPELO, MISSISSIPPI 38801
662.842.8143 · FAX: 662.842.8583 · 800.882.5966
WWW.TLSPECIALTY.COM · SUPPORT@TLSPECIALTY.COM



MAINTENANCE/FACILITIES CLEANERS

ID 240 LF

Industrial Strength Maintenance Cleaner/Degreaser

More Than Cleaning and Degreasing

ID 240LF eliminates the need for chemicals that are otherwise harsh to the environment and user.

Remains Effective Upon Dilution

ID 240LF can often be diluted far beyond conventional cleaners, resulting in superior cost performance.

Meets USDA/FSIS Requirements

ID 240LF has been formulated and labeled in accordance with the new sanitation regulations and guidelines as set forth in the Sanitation Performance Standards Compliance Guide under the authority of the United States Department of Agriculture (USDA).

SAFE

ID 240LF is safe for use on ferrous and non-ferrous metals, aluminum, and painted surfaces. And it is waste water friendly.



Technical Data

chemical composition	surfactants and builders
physical form	liquid
odor	mild
rinsability	free rinsing
normal working conc.	varies
normal working temp.	ambient
biodegradable	yes

Application Rates

Engines and machinery:	2% - 5% (for general cleaning) 5% - 10% (degreasing)
General Purpose:	2% - 5% with water.
Floors:	1% - 5% with water.

Packaging Options

5 gallon pail
55 gallon drum
330 gallon tote tanks or Bulk Delivery

Other Available TLS Products

Shur Draw[®] 420
Heavy-Duty semisynthetic drawing compound

Shur Cool[®] 3830
Non-foaming full synthetic coolant for grinding, milling, drilling and other metalworking operations.

Oxi Stop[®] 2120
A unique blend of wetting agents and corrosion inhibitors designed to give indoor rust protection on ferrous metals.

T & SPECIALTY
Chemicals for Industry

300 AIR PARK ROAD · TUPELO, MISSISSIPPI 38801
662.842.8143 · FAX: 662.842.8583 · 800.882.5966
WWW.TLSPECIALTY.COM · SUPPORT@TLSPECIALTY.COM