

## DRAWING COMPOUNDS

# Shur Draw® 344

Synthetic Water Soluble Metalworking Fluid

### Neat Or Diluted

Shur Draw® 344 is a water soluble synthetic drawing lubricant, which can be used neat or diluted with water, depending on the severity of the draw or stamp.

### Protection Against Corrosion

Shur Draw® 344 provides excellent corrosion inhibition, effective EP (extreme pressure) lubrication, anti-weld, and potent wetting and surface tension reduction, and seize protection at the tool/part interface.

### Improves Tool Life

The EP and rust prevention properties improve metalworking efficiency while at the same time improving tool life.

### Application

Light drawing or stamping	6-10%
Medium drawing or stamping	10-20%
Heavy drawing or stamping	20% to neat

#### Technical Data

Appearance	amber colored viscous liquid
Odor	mild
Specific Gravity	1.065
pH (conc)	10.4
Solubility	complete

#### Performance Data (EP procedure.)

Concentration – 20% by vol.  
 Test - Falex® Pin and V-Block  
 Test Method – 1 minute 500lbs.

Then run without stopping until failure.

#### Packaging Options


5 gallon pail  
 55 gallon drum  
 330 gallon tote tanks

#### Other Available TLS Products

Shur Cool® 4045  
 Heavy-duty semi synthetic metalworking fluid

ID 240  
 Industrial strength cleaner/degreaser

Shur Cool® 3830  
 Non-foaming full synthetic coolant for grinding, milling, drilling and other metalworking operations

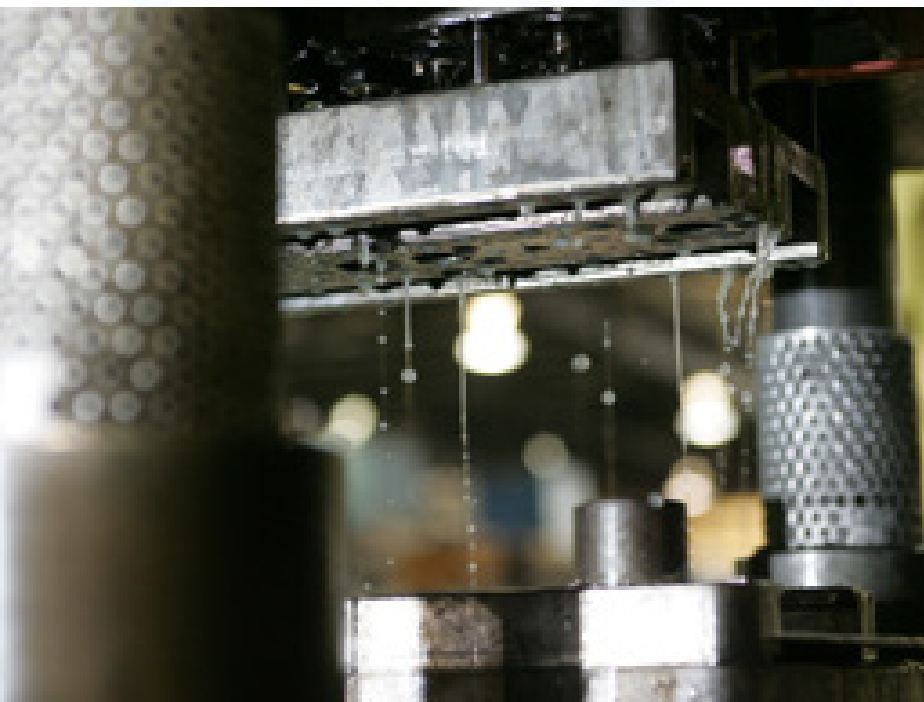

**T & SPECIALTY**  
 Chemicals for Industry

300 AIR PARK ROAD · TUPELO, MISSISSIPPI 38801  
 662.842.8143 · FAX: 662.842.8583 · 800.882.5966  
 WWW.TLSPECIALTY.COM · SUPPORT@TLSPECIALTY.COM