

## DRAWING COMPOUNDS

# Vanishing Oil 325

### Light Viscosity

Vanishing Oil 325 is a light viscosity fluid compounded with additives for use in metal rolling, metal stamping and forming operations.

### No Residue

This product contains a solvent carrier which evaporates quickly leaving behind little to no residue.

### Greater Lubricity

Vanishing Oil 325 contains a special extreme pressure additive, giving greater lubricity for difficult operations.

### Technical Data

chemical composition	aliphatic hydrocarbons
appearance	colorless liquid
odor	little or no odor
specific gravity	0.76
flash point	125°F

### Advantages

Keeps tooling clean, improving tool life  
 High flash point compared to other "vanishing oils"  
 No sulfur or chlorinated products  
 Apply by roller, dip, wipe, or airless spray  
 Suitable for aluminum, light stainless or mild steel  
 Does not require cleaning after machine or forming  
 Prevents buildup on rollers

### Packaging Options


5 gallon pail  
 55 gallon drum  
 330 gallon tote tanks or Bulk Delivery

### Other Available TLS Products

Shur Cool® 4045  
 Heavy-duty semi synthetic metalworking fluid

ID 240  
 Industrial strength cleaner/degreaser

Shur Cool® 3830  
 Non-foaming full synthetic coolant for grinding, milling, drilling and other metalworking operations

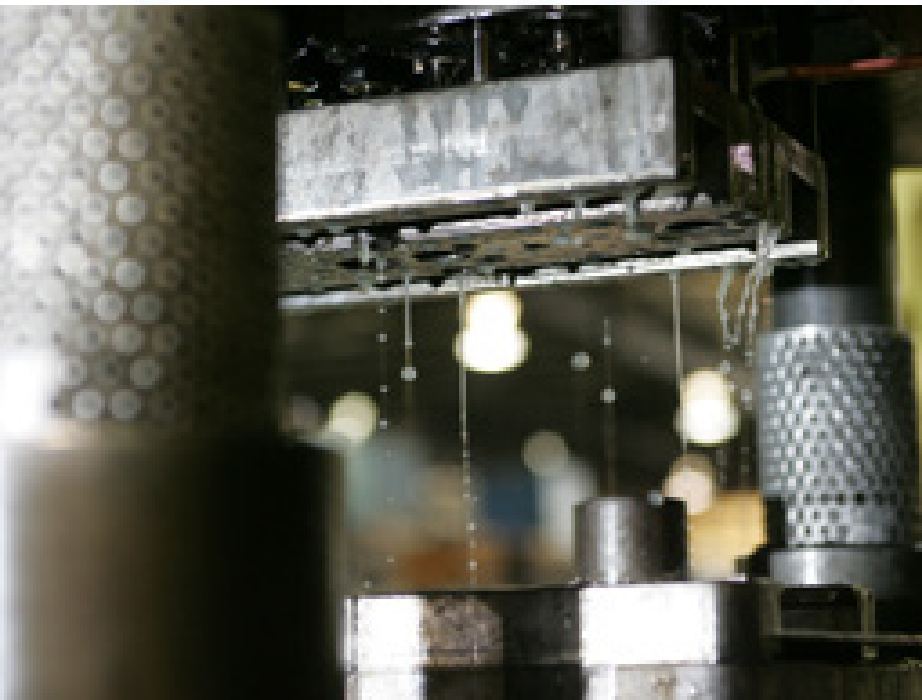

**T & SPECIALTY**  
 Chemicals for Industry

300 AIR PARK ROAD · TUPELO, MISSISSIPPI 38801  
 662.842.8143 · FAX: 662.842.8583 · 800.882.5966  
 WWW.TLSPECIALTY.COM · SUPPORT@TLSPECIALTY.COM